


## Water-cooled power RF- Capacitors (External Cooling)

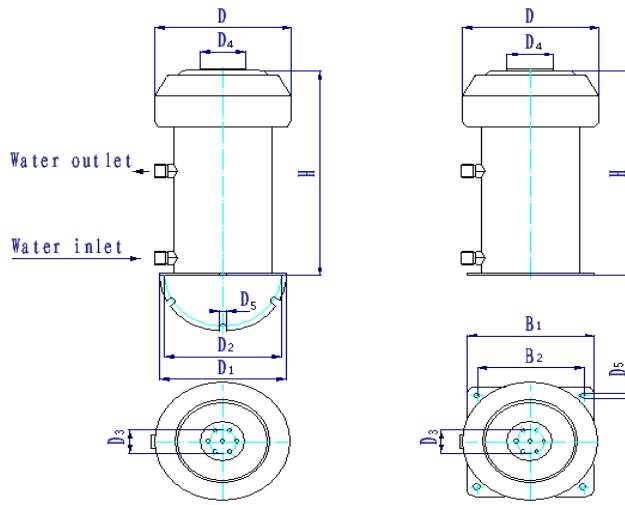

MODEL	RATED VOLTAGE KVp	CAPACITANCE pF±20%	CERAMIC	RATED POWER VA )	MAX CURRENT A	MEASUREMENT										REMARKS
						mm										
						D1	D2	D3	D4	D5	D	B1	B2	H		
CCGS 095162	14	1500	R85	1000	150	95	82	30	40	5.5	110			162	Silicon Rubber	
CCGS 095162	14	2000	R85	1500	150	95	82	30	40	5.5	110			162		
CCGS 095162	14	2500	R85	1500	150	95	82	30	40	5.5	110			162		
CCGS 095220	12	5000	R85	1280	150	95	82	30	40	5.5	110			220		
CCGS 110250	14	4700/5000	R85	2000	200	110	98	30	45	6.5	125			250		
CCGS 135242	25	2500	R85	2500	250	135	122	30	50	6.5	148			242		
CCGS 135242	20	3000	R85	2000	200	135	122	30	50	6.5	148			242		
CCGS 135218	16	4000	R85	2500	250	135	122	30	50	6.5	148			281		
CCGS 135250	16	5000	R85	2830	250	135	122	30	50	6.5	148			250		
CCGS 135285	20	5000	R85	3000	250	135	122	30	50	6.5	148			285		
CCGS 135272	16	6000	R85	2830	250	135	122	30	50	6.5	148			272		
CCGS 125300	14	7600	R85	2500	250			30	50	9.5	148	127	98	303		
CCGS 125300	10	10000	R85	2000	280			30	50	9.5	148	127	98	303		
CCGS 142314	24	5000	R85	3000	250	142	125	30	50	7	148			314		
CCGS 142314	20	6000	R85	3000	250	142	125	30	50	7	148			314		
CCGS 110255	20	1000	R85	1250	125	110	98	30		6.5				255	/	
CCGS 142285	20	4000	R85	3000	250	142	125	30		7	130			285		
CCGS 141310	24	5000	R85	3000	250	141	125	30		7	130			310		